


Product Overview



We mark the future

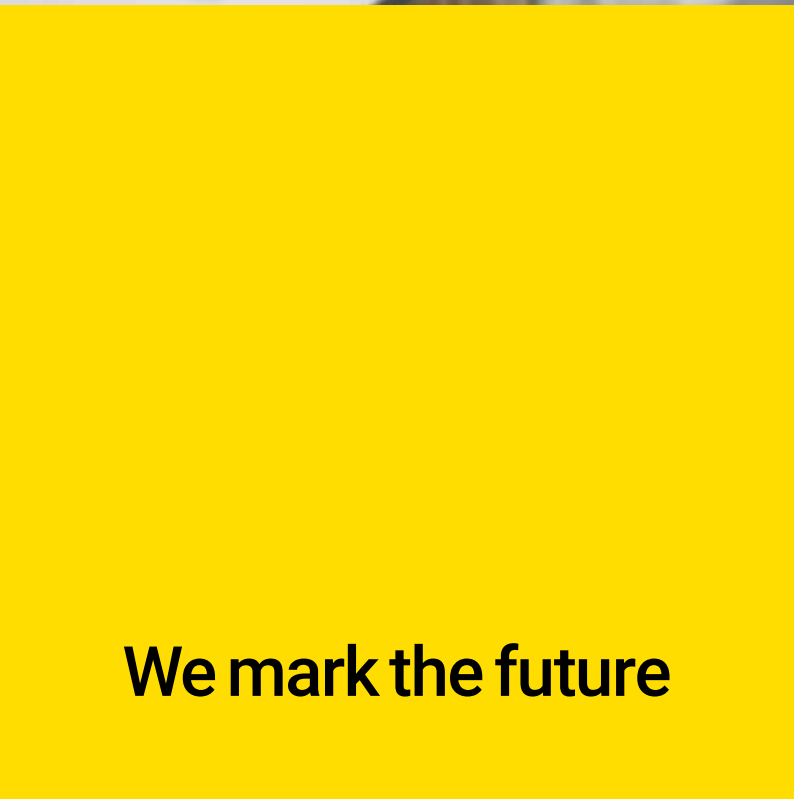

Index

Wire Markers

PA/PAZ	8
PC/PCZ	9
PCT	10
PO	11
PHZ/PHZF	12

Cable Markers

PK+ / PKZ	13
PK-20Q / PKZ20Q	13
PO-068Q / PO-06Q	14
PO-068 / PKZ20	14
PPQ / PPQZ	15
ACM	15
PKS	16

Markers

PKH / POH	17
PKS	17

ProSleeve

Cable Makers	19
Panel Labels	19
Heat shrink tube	19

Component markers

PPA+ / PPAZ	20
PFA	20
PLL / PLT / PLB / PLD	21
PLTC	21

Marker Sleeves

PM	22
PTC	22
PT+ / PTZ / PTM	23

Inserts for Sleeves

PFC	24
PP+	24
PF	25

Printers

T-2000	26
Promark Creator software	26
EOS2 and EOS5	27
MK10-SQUIX	27
MK10-DH	28
SP8600	28
PRIMACY	29
MK500	29

Signs

Plastic	31
Aluminium	31
Stainless Steel	31

Accessories

Cable Ties	32
Edge Clip and Cable tie	32
Compartment boxes	33
PAD	33
MD / MDH	34
CAD / PAM	34
SRP	35
PHL	35
Tape	36
Cord end Ferrules, Crimp Terminals	36

Guides

Printers	38
Ribbons	39
Packaging	40
International color code	40
Customized Markers	41



We mark the future

We commit to making decisions with the future in mind, by investing in sustainable materials and improvements in production, by supporting our communities and employees, and by safe-guarding our customers' investments and innovation. We mark the future. A simple promise with a big meaning.

The simple purpose of a cable marker is to identify it, so you know where it comes from and where it goes to. We believe the same goes for businesses and people – you need to know where you've come from and where you're going.


Where we have come from is the small town of Gullspång in Sweden, a family business since 1948, not only by ownership but in how we operate. Today we have evolved into an expert with a global reach in the marking industry. We call ourselves a 75-year-old start-up because we have the energy and ambition of a start-up together with a heritage valuing loyalty and respect. As we continue to grow we are committed to staying humble and hungry.

Where we are going is further out into the world. There is a lot at stake, and we want to protect the things essential for the future – life, time and resources. In a business that gets bolder with age; we want to be the humble expert, always ready to meet our customers' needs and supporting a safer electric future. Whatever you are building, let us mark it for now and the future.




We make high-quality industrial marking solutions for a safer electric future

Our marking methods




Single characters

Comprising individual character markers that can be combined to provide total marking flexibility.



Multi characters

Enabling you to easily obtain markers pre-printed with complete information, precisely tailored to your specifications.



Do-it-yourself

Empowering you to create your own markers on-site with full control over the process.



Wire Markers

PA- / PAZ Single characters

Closed and adjustable sleeve marker for not yet connected cables. Unique profile with spring effect bellows, which covers a large diameter range. Rotage protection by using an angular cut prevents twisting between adjacent sleeves.



Type	Material	Temperature range
PA-:	PVC	-30°C to +60°C
PAZ:	ZEREX (Halogen free)	-30°C to +90°C

Sizes and packaging:

Type	Ø [mm]	Area* mm ²	Length [mm]	Number of characters	Marker Height [mm]	Marker Width [mm]	Text Height [mm]	Strip pack cut/loose markers	Single bag marker strips	Reel semi cut markers	Compact disc semi cut markers
PA-02/PAZ+02	1.3-3.0	~0.2-1.5	3	1	3.6	3.5	2.6	5 x 200 pcs	250 pcs	1000 pcs	500 pcs
PA-1/PAZ+1	2.5-5.0	~1.5-4.0	3	1	5.5	4.2	2.6	5 x 200 pcs	250 pcs	1000 pcs	500 pcs
PA-2/PAZ+2	4.0-10.0	~2.5-16.0	4	1	9.5	6.6	4.0	5 x 100 pcs	250 pcs	-	250 pcs
PA-3/PAZ3	8.0-16.0	~16.0-70.0	6	1	16.5	11.0	4.0	5 x 20 pcs	-	-	-

*Area sizes for guidance only. Thickness of the cable insulation can differ between different manufacturer. Please contact Partex for sample bags.

Colours:



Marking methods:



Related products:



PA+ / PAZ Multi characters

Closed profile marker for unconnected wires and cables. The unique design enables one marker size to be used with a wide variety of diameters of wire.



Type	Material	Temperature range
PA+:	PVC	-30°C to +60°C
PAZ:	ZEREX (Halogen free)	-30°C to +90°C

Sizes and packaging:


Type	Ø [mm]	Area* mm ²	Length [mm]	No of characters
PA+02/PAZ+02	1.3 - 3.0	~0.2-1.5	9-48	1 - 30
PA+05/PAZ+05	2.0 - 4.0	0.5 - 2.5	9-48	1 - 30
PA+1/PAZ+1	2.5 - 5.0	0.75 - 4.0	9-48	1 - 30
PA+2/PAZ+2	4.0 - 10.0	2.5 - 10.0	9-48	1 - 30
PA-3/PAZ3	8.0 - 16.0	16.0 - 70.0	9-48	1 - 30

*Area sizes for guidance only. Thickness of the cable insulation can differ between different manufacturer. Please contact Partex for sample bags.

Colours:



Marking methods:



Related products:



PC Single characters

Open single markers for already connected wires. Fast snap-on installation. Securely positioned with help of barbs. Twist-protected for secure combination marking.



Material	Temperature range
PVC	-30°C to +60°C

Sizes and packaging:

Type	Ø [mm]	Area* mm ²	Length [mm]	No of characters	Marker Height [mm]	Marker Width [mm]	Text Height [mm]	Strip pack cut/loose markers or strips
PC-10	2.4-3.0	~0.4-1.5	3	1	3.6	3.7	2.6	5x200 pcs
PC-20	3.0-4.0	~1.5-3.0	3	1	4.2	4.5	2.6	5x200 pcs
PC-30	4.0-5.0	~3.0-4.0	3	1	9.5	5.7	2.6	5x200 pcs
PC-40	5.0-6.2	~4.0-5.0	4	1	16.5	6.9	4.0	5x200 pcs

*Area sizes for guidance only. Thickness of the cable insulation can differ between different manufacturer. Please contact Partex for sample bags.

Colours:



Marking methods:



Related products:



Compartment box

PC / PCZ Multi characters

Open customized wire marker for already connected wires. Enables fast snap-on installation. Securely positioned with help of barbs.



Type	Material	Temperature range
PC:	PVC	-30°C to +60°C
PCZ:	ZEREX (Halogen free)	-30°C to +90°C

Sizes and packaging:


Type	Ø (mm)	Area* mm ²	Length [mm]	No of characters
PC-10/PCZ10	2.4 - 3.0	0.5 - 1.5	9 - 100	1 - 30
PC-20/PCZ20	3.0 - 4.0	1.5 - 2.5	9 - 100	1 - 30
PC-30/PCZ30	4.0 - 5.0	2.5 - 4.0	9 - 100	1 - 30
PC-40/PCZ40	5.0 - 6.2	4.0 - 6.0	9 - 100	1 - 30
PC-50	6.0 - 7.2	~10.0		1 - 30

*Area sizes for guidance only. Thickness of the cable insulation can differ between different manufacturer. Please contact Partex for sample bags.

Colours:



Marking methods:



Related products:



MK500

Wire Markers

PCT Multi characters

Open wire marker, for already connected wires, for print on thermal transfer printers. An unique design of the marker makes it easy to mount even on bent wires. Securely positioned with help of barbs.



Material


Halogen-free, cadmium and silicone-free
 Marker base: ABS
 Text field: ZEREX (Halogen free)

Temperature range

-40°C to +90°C

Sizes and packaging:


Type	Height h [mm]	Width W1 [mm]	Width W2 [mm]	Width W3 [mm]
PCT 10	3,6	3,5	3,9	3,8
PCT 20	4,0	4,5	3,9	4,8
PCT 30	4,9	5,0	3,9	5,3
PCT 40	4,8	5,7	3,8	5,9



Colours:



Marking methods:



Related products:



MK10-EOS2



MK10-EOS5



PO / POZ Multi characters

Oval marking profile with built in spring action that retains sleeve shape with excellent grip. Designed for the most popular sizes of wires and cables.



Type	Material	Temperature range
PO:	PVC	-30°C to +60°C
POZ:	ZEREX (Halogen free)	-30°C to +90°C

Sizes and packaging:


Type	Ø [mm] [min/max]	AREA* [mm²]	Compacta disc	DN-reel	BN-reel	Box PO	Box POZ
PO/POZ-01	1.3 / 1.8	~0.25	6.0 m	60 m	250 m	-	250 m
PO/POZ-02	1.7 / 2.2	~0.5	5.0 m	60 m	250 m	-	250 m
PO/POZ-03	2.0 / 2.5	~0.75	4.5 m	50 m	250 m	-	250 m
PO/POZ-04	2.2 / 2.8	~1.0	4.5 m	50 m	200 m	-	200 m
PO/POZ-05	2.7 / 3.5	~1.5	4.0 m	40 m	200 m	-	200 m
PO/POZ-06	3.2 / 4.0	~2.5	3.5 m	40 m	200 m	-	200 m
PO-06Q10*	-	-	3.5 m	40 m	100 m	-	-
PO-068TW	6.8 / 7.0	-	4.5 m	25 m	100 m	-	-
PO-068Q*	-	-	-	25 m	50 m	-	-
PO/ POZ-07	3.8 / 4.7	~4.0	3.5 m	30 m	100 m	-	100 m
PO/ POZ-08	4.6 / 5.5	~6.0	-	30 m	100 m	-	100 m
PO/ POZ-09	5.6 / 7.0	~10.0	-	-	50 m	-	50m
PO/ POZ-10	6.5 / 8.0	~16.0	-	-	50 m	-	50m
PO/ POZ-11	7.0 / 9.5	~18.0	-	-	-	5x10 m	5x10 m
PO/ POZ-12	7.5 / 10.0	~20.0	-	-	-	5x10 m	5x10 m
PO/ POZ-14	9.5 / 12.0	~25.0	-	-	-	5x10 m	5x10 m
PO/ POZ-16	11.5 / 14.0	~35.0	-	-	-	2x5 m	2x5 m
PO/ POZ-18	13.5 / 16.0	~50.0	-	-	-	2x5 m	2x5 m
PO/ POZ-20	15.5 / 18.0	~70.0	-	-	-	2x5 m	2x5 m
PO/ POZ-22	17.5 / 20.0	~95.0	-	-	-	2x5 m	2x5 m
PO/ POZ-24	19.5 / 22.0	~120.0	-	-	-	2x5 m	2x5 m
PO/ POZ-26	21.5 / 24.0	~150.0	-	-	-	2x5 m	2x5 m
PO/ POZ-28	24.0 / 28.0	~185.0	-	-	-	2x5 m	2x5 m

*Area sizes for guidance only. Thickness of the cable insulation can differ between different manufacturer. Please contact Partex for sample bags.

Colours:



Marking methods:



Related products:



PROMARK Printers



EOS and MK10 printers



SP8600

Wire Markers

PHZ / PHZF Multi characters

A flexible halogen free heat-shrinkable profile with excellent properties on fire safety characteristics. Low smoke generation and evolution of acid gases. Shrink ratio 2:1. PHZ = round profile. PHZF=flat profile.



Material

Flexible halogen free polyolefin

Temperature range

-55°C to +105°C

Shrinkage temperature

> 90°C


Sizes and packaging:

Type	Ø, before [mm]	Ø, shrunked [mm]	Ø, before [inch]	Ø, shrunked [inch]	PHZ REEL	PHZF REEL
PHZ / PHZF20024	2.4	1.2	3/32	3/64	25/150 m	25/100 m
PHZ / PHZF20032	3.2	1.6	1/8	1/16	25/150 m	25/100 m
PHZ / PHZF20048	4.8	2.4	3/16	3/32	25/150 m	25/100 m
PHZ / PHZF20064	6.4	3.2	1/4	1/8	25/150 m	25/100 m
PHZ / PHZF20095	9.5	4.7	3/8	3/16	150 m	100 m
PHZ / PHZF20127	12.7	6.4	1/2	1/4	150 m	100 m
PHZ / PHZF20190	19.1	9.5	3/4	3/8	50 m	50 m
PHZ / PHZF20254	25.4	12.7	1	1/2	50 m	50 m
PHZ / PHZF20381	38.1	19.1	1.1/2	3/4	25 m	25 m
PHZ20510	50.8	25.4	2	1	25 m	
PHZF20504	50.4	25.2	2	1		25 m

Colours:



Marking methods:



Related products:



PROMARK Printers



EOS and MK10 printers



Cable Markers

PK+ / PKZ Single characters

Combination marker for cable and pipe marking. One size for all diameters. Installed quickly onto Partex PKH or POH holder which is fastened with cable ties around the cable.



Type	Material	Temperature range
PK+:	PVC	-30°C to +60°C
PKZ:	ZEREX (halogen free)	-30°C to +90°C

Sizes and packaging:

Type	Marker Length [mm]	Marker Height [mm]	Marker Width [mm]	No of characters	Text Height [mm]	Strip pack cut /loose markers	Compacta disc semi cut markers
PKZ	6	4.3	11.3	1	3.2	5 x 100 pcs	500 pcs
PK+	4	4.3	11.3	1	4.0	5 x 100 pcs	500 pcs

Colours:



Marking methods:



Related products:



POH holder

PKH holder

Cable Ties

Compartment box

PK-20Q / PKZ20Q Multi characters

Customized cable marker with pre punched holes, easy mounted with cable ties.



Type	Material	Temperature range
PK-20Q:	PVC	-30°C to +60°C
PKZ20Q:	ZEREX (halogen free)	-30°C to +90°C

Sizes and packaging:

Customized marker

Type PVC	Type Zerex	Length [mm]	Max QTY character	Punched holes
PK-20Q18		18	7	both ends
PK-20Q25	PKZ20Q25	25	12	in center
PK-20Q40	PKZ20Q40	40	21	both ends
PK-20Q60		60	42	both ends
PK-20Q80		80	60	both ends
PK-20Q100		100	82	both ends

Continuous profile


Type PVC	Description	Meter / Packagin
PKZ20Q10*	PKZ 2 profile Zerex, 10mm between punched holes	20m / DN-reel
PK-20Q10	PKZ 2 profile, 10mm between punched holes	100m / BN-reel

*= Only PKZ20Q10 is printable with EOS, MK10 and Promark printers.

Colours:



Marking methods:



Related products:



PROMARK Printers*

EOS and MK10 printers*

Cable Ties

Cable Markers

PO-068 / PKZ20 Multi characters

Oval marking profile designed for mounting on POH or PKH holders fixed with cable ties on cable.



Type	Material	Temperature range
PO-068:	Soft PVC	-30°C to +60°C
PKZ20:	ZEREX (Halogen free)	-30°C to +90°C


Sizes and packaging:

Type	Ø [mm] [min/max]	Compacta disc	DN-reel	BN-reel	KN-box
PO-068TW	6.8 / 7.0	4.5 m	25 m	100 m	
PKZ20	6.8 / 7.0		20 m		2 x 100 m

Colours:



Marking methods:



Related products:



PROMARK Printers



EOS and MK10 printers



PKH Holder



POH Holder



Cable Ties

PO-068Q / PO-06Q Multi characters

Pre-punched profile, with 10 mm hole spacing. The marker is easily and quickly mounted, with cable ties, to any size of cable. PO-068Q has width 11.4 mm and PO-06Q has width 7,9 mm.



Material	Temperature range
PVC	-30 to +60°C


Sizes and packaging:

Type	Compacta disc	DN-reel	BN-reel
PO-06Q10	3.5 m	40 m	100 m
PO-068Q	-	25 m	50 m

Colours:



Marking methods:



Related products:



PROMARK Printers



EOS and MK10 printers



Cable Ties

PPQ / PPQZ Multi characters

Flat cable marker with pre-punched holes for mounting on the cable with cable ties. The elastic material ensures that the marker is firmly attached to the cable.




Type	Material	Temperature range
PPQ:	Soft PVC	-20°C to +60°C
PPQZ:	Halogen free	-55°C to +105°C


Sizes and packaging:

Type	Width [mm]	Length [mm]	PCS / ROLL
PPQ+10040	10 mm	40 mm	500
PPQ+10060	10 mm	60 mm	330
PPQ+10080	10 mm	80 mm	250
PPQ+10100	10 mm	100 mm	200
PPQ+19040	19 mm	40 mm	500
PPQ+19060	19 mm	60 mm	330
PPQ+19080	19 mm	80 mm	250
PPQ+38060	38 mm	60 mm	330
PPQ+38080	38 mm	80 mm	250
PPQ+38100	38 mm	100 mm	200
PPQ+50080	50 mm	80 mm	250
PPQ+50100	50 mm	100 mm	200
PPQ+06010*	10 mm	60 mm	1000

Colours:



Marking methods:



Related products:



EOS and MK10 printers



Cable Ties

*= Ladder style

ACM Multi characters

A cost-effective and easy way to make cable markers. You only need a standard laser printer. Accurate, laser-cut, perforations make it easy to remove printed labels. The marker is easily and quickly mounted, with cable ties, to any size of cable.



Material	Temperature range
Polyester	-40°C to 85°C


Sizes and packaging:

Article No	Description	Label Size WXH	Labels/Sheet	Sheets/Pack	Labels/Pack
ACM1360	A4 sheet, cable marker	60x13 mm	60	10	600
ACM1390	A4 sheet, cable marker	90x13 mm	40	10	400
ACM2090	A4 sheet, cable marker	90x20 mm	24	10	240

Colours:



Marking methods:



Related products:



Cable Ties

Cable Markers

PKS Single characters

Acid resistant heavy duty stainless steel single character markers. Markers are fitted on to stainless steel carrier strip and mounted to the cable with ties. Carriers are available with slots or with holes.



Material

AISI 316 stainless steel

Temperature range

Extreme conditions

Sizes and packaging:

Type	Description	Length x width [mm]	Slot/hole width [mm]	Max number of single characters	Packaging
PKS10040	Holder	10,3 x 47,0	4,8	6	50 pcs/bag
PKS10060	Holder	10,3 x 65,0	4,8	9	50 pcs/bag
PKS10080	Holder	10,3 x 87,0	4,8	13	50 pcs/bag
PKS10100	Holder	10,3 x 109,0	4,8	17	50 pcs/bag
PKS10120	Holder	10,3 x 128,0	4,8	20	50 pcs/bag
PKS10150	Holder	10,3 x 158,0	4,8	24	50 pcs/bag
PKS10006PP.#	Strips of characters				50 pcs/bag

= A-Z, 0-9 etc.

Colours:



Marking methods:



Related products:



Stainless Cable Ties

Tools

Compartment box

PKS Multi characters

Embossed stainless steel multi-character markers, used to mark wires, cables and equipment, wherever the highest marker durability is required due to harsh conditions. Mounted with cable ties, screws or rivets.



Material

AISI 316 stainless steel

Temperature range

Extreme conditions

Sizes and packaging:

Type	Height [mm]	Length [mm]	Slot width [mm]	Number of fittings	Text height	Max no of lines*
PKS10	10	50, 70, 90, 110, 130, 150, 170, 190, 200, 220	4,8	single 2 x 1	3,2 / 5,5	2
PKS19	19	50, 70, 90, 110, 130	4,8	single 2 x 1	3,2 / 5,5	3
PKS25	25,4	50, 70, 90, 110, 130	4,8	single 2 x 1	3,2 / 5,5	4
PKS32	32	50, 70, 90, 110, 130	4,8	double 2 x 2	3,2 / 5,5	4
PKS38	38	50, 70, 90, 110, 130	4,8	double 2 x 2	3,2 / 5,5	4

Colours:



Marking methods:



Related products:



Stainless Cable Ties

Tools

PKH/POH Holder

Holders for PK+/PKZ and PO/POZ markers easily mounted with cable ties to fit any size of cable.

Type	Width x Length [mm]	Max number PK+	Max number PKZ 2/6	Packaging
PKH070	9,0 x 70	10	7	100 pcs/bag
PKH070POL*	9,8 x 70	10	7	100 pcs/bag
PKH110POL*	9,0 x 100	20	13	100 pcs/bag
POH07060^	8,3 x 60	7	5	100 pcs/bag
POH07060POL*	8,0 x 60	7	5	100 pcs/bag
POH12082^	8,3 x 82	12	9	100 pcs/bag
POH12082POL*	8,0 x 82	12	9	100 pcs/bag
POH18110	8,3 x 110	18	13	100 pcs/bag
POH30152	8,3 x 152	29	20	100 pcs/bag

*Made in outdoor halogen free, black Polyamide 6.6.
The other holders are made in hard PVC
^Available in red, yellow, green, blue and white.



PKS Holder

Stainless steel holders for single character markers. Available with slits and holes.

Type	Description	Width x Length [mm]	Slit / hole width [mm]	Max number of single characters	Packaging
PKS10040	Holder	10,3 x 47,0	4,8	6	50 pcs/bag
PKS10060	Holder	10,3 x 65,0	4,8	9	50 pcs/bag
PKS10080	Holder	10,3 x 87,0	4,8	13	50 pcs/bag
PKS10100	Holder	10,3 x 109,0	4,8	17	50 pcs/bag
PKS10120	Holder	10,3 x 128,0	4,8	20	50 pcs/bag
PKS10150	Holder	10,3 x 158	4,8	24	50 pcs/bag



Related products:



Cable ties



Single markers

R208



PROSLEEVE

Series of high-specification heat shrink, cable marker and panel label system in ladder format. Developed to meet a specific demand; such as fire safety, high temperature, military standards, etc.



Cable Markers

Type	Description
CMC	ZERO HALOGEN. Cable marker made of zero halogen, crosslinked UV stabilized polyolefin with low toxicity.
CML*	EXTENDED FIRE SPECIFICATION. Cable marker made of zero halogen, crosslinked UV stabilized polyolefin with low toxicity. London underground approved.
CMT*	EXTREME TEMPERATURE. High temperature rated, flexible, highly flame retardant, polyvinylidene fluoride printable cable markers. Excellent chemical and mechanical properties.
CMD*	DIESEL SPECIFICATION. CMD meets printing and fluid resistance standards of SNCF NF F 00-608 type H, SAE-AS5942, as well as MIL-STD-202.Method 215K and SAE-AMS-DTL-23053-6 class 1 standards.
CMM*	MILITARY GRADE. CMM meets printing and fluid resistance standards of NF F 00-608 type H, SAEAS5942, as well as MIL-STD-202 Method 215K and SAE-AMS-DTL-23053-6 class 1 standards.

*= On request.

Panel Labels

Type	Description
EPL	ENHANCED PANEL LABELS. Innovative labels specifically designed to replace engraved and plotted plates.
EPF*	ENHANCED PANEL LABELS LOW FIRE HAZARD. EPF is made of low fire hazard zero halogen, self-extinguishing, crosslinked UV stabilized polyolefin with low toxicity. It is used mostly for mass transit and underground applications.

*= On request.

Heat shrink tube


Type	Description
MG	STANDARD GRADE. Flame retardant UL224 VW-1 Flammability. Self-extinguishing. Shrink Ratio 2:1.
HZ	HALOGEN FREE. Low smoke, flame retardant heat shrinkable tubing. Shrink Ratio 2:1.
MS*	MILITARY SPECIFICATION. Very flexible, high temperature rated, highly flame retardant, UL and CSA recognised heat shrinkable tubing. Shrink Ratio 3:1.
NF*	NF DIESEL SPECIFICATION. Diesel resistant sleeve meet the material and physical property requirements of SEA-AMS-DTL-23053-6 Class 1. Shrink Ratio 3:1.
ET*	EXTREME TEMPERATURE PERFORMANCE. High temperature rated, flexible, highly flame retardant, polyvinylidene fluoride printable sleeves. Excellent chemical and mechanical properties with low friction surface. Shrink Ratio 2:1.
EF*	EXTENDED FIRE SPECIFICATION. Flame retardant, zero halogen, low smoke, low toxicity cross linked UV stabilised and printable polyolefin. Meets London Underground Limited Standard 1-085. Shrink Ratio 2:1.

*= On request.

Colours:



Marking methods:



Related products:



EOS and MK10 printers



Cable Ties

Component Markers

PPA+ / PPAZ

Flat, hard profile with an adhesive tape backing. The thick layer of adhesive ensures a strong grip on uneven surfaces (e.g. powder-painted cabinet).



Type	Material	Temperature range
PPA+:	PVC	-20°C to 60°C
PPAZ:	Halogen free	-30°C to 90°C


Sizes and packaging:

Type	Description	Compacta disc width [mm]	Compacta disc length [m]	DN-Reel length [m]
PPA+profile	Flat hard profile, adhesive	9.0	10	25
PPAZ profile	Flat hard ZEREX profile, adhesive	9.0	6	20

Colours:



Marking methods:



Related products:



PROMARK Printers

EOS and MK10 printers

PFA

Self-adhesive label material for direct marking in cabinets and on components. Label modules pre-punched in standardized 17.5 mm units. Very durable and environment resistant printout by laser printer.



Material	Temperature range
Halogen free self-adhesive polyester foil, specially pre-processed for printing.	-30°C to +120°C


Sizes and packaging:

Type	Height [mm]	Length [mm]	Number of labels (row x columns)	Number of 12" sheets / packs	Total number of labels / packs
PFA20018KT	9,5	17,5	10 ark x 32 x 11 psc	10 pcs	3520 pcs

Colours:



Marking methods:



PLL / PLT / PLB / PLD

Labels for cable and component marking. Pre-printed labels with symbols, numbers or letters. Empty labels for print in thermal transfer printers or laser printers. A wide range of materials.




Sizes and packaging:

Type	Description
PLL	Adhesive labels in polyester for laser printer. Colours: Yellow, white, silver.
PLT	Adhesive labels in polyester on roll for thermal transfer printer. Colours: Yellow, white, silver.
PLB / PLC	Pre-printed labels with standard symbols, numbers and letter. Colours: Yellow.
PLD	Dispenser with pre-printed labels (rolls). Colours: Yellow, white.

Colours:



Marking methods:



Related products:



EOS and MK10 printers

PLTC

A soft and flexible printable universal tape, for indoor and outdoor use. Excellent resistance to moisture, alcohols and oil.



Material

Vinyl

Temperature range

-40°C to +80°C

Sizes and packaging:


Type	Description	Height [mm]	Pack. Roll
PLTC009000D*VR	Tape, removable	9	100 m
PLTC009000D*VP	Tape, permanent	9	100 m
PLTC012000D*VP	Tape, permanent	12	100 m
PLTC025000D*VP	Tape, permanent	25	60 m
PLTC050000D*VP	Tape, permanent	50	30 m
PLTC100000D*VP	Tape, permanent	100	30 m

* = color code.

Colours:



Marking methods:



Related products:



EOS and MK10 printers

Marker Sleeves

PM

Transparent holder used to mark cables with PF labels, PFC cards or a PP+ profile. Fitting and fastening with cable ties.



Material

Cadmium and silicon free soft PVC according to Partex formula.

Temperature range

-30°C to +60°C

Sizes and packaging:

Type	Punched Profile	Length [mm]	Width [mm]	Width of punched hole [mm]	Packaging
PM-10	No	33	6.0	3.0	100 pcs
PM-20	No	33/45/66	11.3	3.0	100/50 pcs depending on marker size
PM-24	No	33/66	13.9	3.9	100/50 pcs depending on marker size
PM-20Q	Yes	20 m	11.3	3.0	DN reel
PM-24Q	Yes	20 m	13.9	3.9	DN reel
PM-20	No	20 m	11.3		DN reel

Colours:



Related products:



PP+



PFC



PF



Cable Ties

PTC

Open marker with a transparent label pocket for snap on mounting onto already connected cables and wires.



Material

Cadmium and silicon free rigid PVC in the sleeve body and soft PVC in the transparent pocket according to Partex formula.

Temperature range

-40°C to +60°C

Sizes and packaging:

Type	Pocket width [mm]	Ø [mm]	Area* [mm ²]	Sleeve lengths [mm]	Loose, cut sleeve in bag
PTC10	4.6	2.4 - 3.0	~0.4 - 1.5	15/21/30	200 pcs
PTC20	4.6	3.0 - 4.0	~1.5 - 3.0	15/21/30	200 pcs
PTC30	4.6	4.0 - 5.0	~3.0 - 4.0	15/21/30	200 pcs
PTC40	4.6	5.0 - 6.2	~4.0 - 5.0	15/21/30	100 pcs
PTC50	4.6	6.2 - 7.2	~5.0 - 6.0	15/21/30	100 pcs

*Area sizes for guidance only. Thickness of the cable insulation can differ between different manufacturer. Please contact Partex for sample bags.

Colours:



Related products:



PP+



PFC



PF

Marker Sleeves

PT+ / PTZ / PTM

- PT+ Transparent sleeve with pocket for marking labels
- PT+PFC Transparent sleeve with pocket for PFC marking labels
- PTZ+ Halogen free coloured sleeve with transparent pocket for marking labels
- PTM Transparent sleeve with wings for easy mounting on cables or wires by using cable ties



Sizes and packaging:

Type	Ø [mm]	Area* [mm ²]	Sleeve length [mm]	Loose, sleeves in bag	Suitable tags
PT+ Transparent sleeve with transparent pocket					
PT+02	1.3 - 3.0	~0.25 - 1.5	12/15/18/21/30	200 pcs	PF, PP+
PT+10	2.5 - 5.0	~1.5 - 4.0	12/15/18/21/30	200 pcs	PF, PP+
PT+20	4.0 - 10.0	~2.5 - 16.0	12/15/18/21/30	100 pcs	PF, PP+, PFC
PT+30	8.0 - 16.0	~16.0 - 75.0	12/15/18/21/30	50 pcs	PF, PP+, PFC
PT+40	14.0 - 22.0	~50.0 - 150.0	15/21/30	50 pcs	PP+, PFC
PT+PFC Transparent sleeve with transparent pocket for PFC					
PT+PFC02	1.3 - 3.0	~0.25 - 1.5	12/15/18/21/30	200 pcs	PFC
PT+PFC10	2.5 - 5.0	~1.5 - 4.0	12/15/18/21/30	200 pcs	PFC
PTZ+ Coloured sleeve with transparent pocket					
PTZ+02	1.3 - 3.0	~0.25 - 1.5	12/15/18/21/30	200 pcs	PF, PFC, POZ
PTZ+10	2.5 - 5.0	~1.5 - 4.0	12/15/18/21/30	200 pcs	PF, PFC, POZ
PTZ+20	4.0 - 10.0	~2.5 - 16.0	12/15/18/21/30	100 pcs	PF, PFC, POZ
PTM Transparent sleeve with wings					
PTM10	-	-	23/30	500 pcs (in carton box)	PP+, PFC
PTM20	-	-	20	500 pcs (in carton box)	PFC

*Area sizes for guidance only. Thickness of the cable insulation can differ between different manufacturer. Please contact Partex for sample bags.

Colours:



Related products:



Inserts for Sleeves

PP+

Flat semi hard profile suited for PT+, PTC, PTM and PM sleeves.

Material
PVC

Temperature range
-20°C to +60°C




Sizes and packaging:

Type	Description	Compacta disc width [mm]	Compacta disc length [m]	DN-Reel length [m]
PP+profile	Flat hard profile	4.6 / 6.3 / 9.0 / 10.2 / 11.0	17	50

Colours:



Marking methods:



Related products:



PROMARK
Printers

EOS and MK10 printers



PM

PT+

PTC

PTM

PFC

PFC card is marking system in credit card format with easily detachable marker tags. Card variants with adhesive labels for component marking, cable marker tags for direct mounting with cable ties.



Type
PFC042, PFC075, PFC095:
PFC070, PFC127, PFC450:

Material
ABS
Polyester

Temperature range
Shape permanence (ABS)
from -30°C
to +60°C.


Sizes and packaging:

Type	Description	Marker tag length [mm]	Marker tag height [mm]
PFC042	For wire marking	12 / 15 / 18 / 21 / 30	4.2
PFC07533	For cable marking	33	7.5
PFC09518	For component or cable marking	17.5	9.5
PFC095	For cable marking	40 / 80	9.5
PFC07014	With adhesive for component marking	14	7.0
PFC12726	With adhesive for component marking	25.4	12.7
PFC45080	With adhesive for component marking	80	45.0

Colours:



Marking methods:



Related products:



PT+PFC

PTZ+

PTC

Cable Ties

Primacy

PM

PS

PTM

Inserts for Sleeves

PF

Halogen free, rigid label material for cables, wires, cabinets and components.
For Partex holder systems PT+, PTZ+, PTC, PM and PS.



Material

Polyester foil, specially preprocessed for printing.

Temperature range

-30°C to +120°C


Sizes and packaging:

Type	Width [mm]	Length [mm]	Number of labels per sheet	Number of sheets per pack	Description
PF-10015	4.6	15.0	792	10	Yellow or White
PF-10021	4.6	21.0	594	10	Yellow or White
PF-20018	9.5	17.5	352	10	Yellow or White
PF-07533	7.6 - 7.8	33.0	100	10	White
PFA20018	9.5	17.5	352	10	Yellow or White with adhesive

Colours:



Marking methods:



Related products:



Printers

PROMARK T-2000

A compact, fast and portable marking printer of markers for cables, wires, and components. Feeds, prints and cuts Partex profile. Bluetooth wireless connection allows you to control the printer from mobile devices using Promark Creator GO app. Powered by 6 dedicated AA batteries with a capacity of 1900 mAh each or by power grid. Printer menu is available in 10 languages.



Basic kit includes

- PROMARK T-2000 Printer
- Promark Creator software
- Power cable, USB cable, AC adapter
- Ink ribbon (40 m)
- Tube attachment
- Reel stand
- Soft carrying case
- PO-05 profile, PO-068TW profile

Information

Print:
Ribbon, thermal transfer printing

Speed:
18,5, 25 or
40 mm/s

PC connection:
USB, Bluetooth

Profile types:
Continuous profiles
Tape cassettes

Markers printed on device:



Related products:



Ribbon

PROMARK CREATOR Software

Promark Creator is the perfect tool for designing and managing the production of markers. It is an intuitive program that allows you to flawlessly select markers with the right parameters. Above all, however, it allows you to easily design even the most complex and complicated description, and this is achieved by an advanced expression editor for imported data. A must-have for designers.

Most useful for owners of PROMARK, MK10 and EOS printers or office laser printers. Design and mark.



Features

- Easy data import from various sources, including excel.
- Create your own marking project, where you easily create complex and detailed markers. Ability to insert images, QR code and barcode.
- Promark Creator GO. Control printer via mobile device with app and Bluetooth.
- Store and share Promark Creator files in the Partex cloud.
- During print of a project, you can start work on the next project.
- Print on one or more devices simultaneously.

MK10-EOS2 and MK10-EOS5

Professional, very efficient printer for the production of large quantities of markers for cables, wires and electrical components. It feeds, prints and perforates (option perforator) Partex profiles. Small table printer for high demand production of Partex profiles. USB or wifi connection, controlled with Partex Promark Creator software. EOS5 is also available in a mobile version (battery).



Basic kit includes

- Label and marker printer
- Power cord
- USB cable
- Promark Creator software

Information

Print: Thermal transfer printer
PC connection: USB 2.0
Speed: 150 mm/s
Profile types: Continuous profiles

Markers printed on device:



Related products:



Ribbon, see page 39

MK10-SQUIX

A heavy duty thermal-transfer printer. Professional, efficient printer for making large quantities of markers for cables, wires and electrical components. It feeds, prints and perforates or cut Partex profiles. USB or wifi connection, controlled with Partex Promark Creator software.



Basic kit includes

- MK10-SQUIX printer
- Power cord
- USB cable
- Ink ribbon
- Wi-Fi module
- Promark Creator software
- Cutting unit

Information

Print: Thermal transfer printer
PC connection: USB 2.0, WiF
Speed: 300 mm/s
Profile types: Continuous profiles

Markers printed on device:



Related products:



Ribbon, see page 39

Printers

MK10-DH

Compact double-sided heavy duty printer for high demand production of wire, cable and component markings. Feeds, prints and cuts bulk Partex profiles. Prints on both sides of the profile. Dual printing heads.



Basic kit includes

- Printer MK10-DH
- Cutting unit
- Promark Creator software
- Two ribbon
- USB cable

Information

Print: Thermal transfer printer
PC connection: USB 2.0
Speed: 125 mm/s
Profile types: Continuous profiles

Markers printed on device:



Related products:



Ribbon, see page 39

SP8600

Compact heavy duty machine for high demand production of wire and cable marking. Automatic feeding of marker profile, printing and partial or complete cutting function. The machine is controlled by either a connected PC with Partex software Win-Sign or an optional standard computer keyboard working as a stand alone unit.
 Diameter Range: I.D. 2.0 mm to 28 mm (or flatly folded width 45 mm), 0,2mm to 0,7 mm in thickness



Basic kit includes

- SP8600 printer
- WinSign software
- USB flashdrive
- USB cable
- Power supply cord
- Ribbon black, S611-20

Information

Print: Thermal transfer printer
PC connection: USB
Speed: About 4900 pcs per hour
Profile types: Continuous profiles
 For PA-profil is additional feeder reels required.

Markers printed on device:



PRIMACY

Compact and powerful card printer, easy to use, high performance and user-friendly. Prints on to Partex PFC cards.



Basic kit includes

- PRIMACY card printer
- Software
- Ribbon
- Printer Cable

Information

Print: Ribbon, thermal transfer printing
PC connection: USB
Speed: 1000 cards/hour
Profile types: PFC-cards

Markers printed on device:



PFC CARDS

MK500

A3 plotter that provides complete customized marking for cables, wires, terminal blocks and components. Blank markers are placed in fixture when printing. Prints on Partex products: PA+, PC, PK, POH, TX and PS.



Basic kit includes

- Plotter MK500
- Software PMS
- Printer Cable

Information

Print: Plotter pens with etching ink
PC connection: USB or RS232
Speed: 5 to 40 mm/s
Profile types: Pre-cut profiles

Markers printed on device:



PA

PC

PK

TX

PS

Related products:



Fixture



Signs in Plastic

Laser-engraved signs made of dual-layer laminate offer clear and durable visual identification for marking control panels, components, cables, pipes, and hoses. They are suitable for both indoor and outdoor use, and the material is UV stable.

These signs are delivered with self-adhesive backing and can be provided with fixing holes for screws, rivets, or ties.



Signs in Aluminium

Laser-engraved signs made of aluminum offer a lightweight and durable solution for signage and marking, suitable for both indoor and outdoor applications.

These signs can be provided with fixing holes for screws, rivets, or ties.



Signs in Stainless Steel

Embossed signs made of high-quality stainless steel for industrial use. These durable corrosion-resistant signs meet the needs for efficient visual identification in tough and demanding environments. Both for indoor and outdoor applications.

These signs can be provided with fixing holes for screws, rivets, or ties.



Accessories

CABLE TIES

A selection from our range of cable ties for indoor and outdoor installation.

Type	Description
Nylon	Cable ties of high quality Nylon 6.6.
UV resistant	Ultra-violet resistant cable ties, specially manufactured with extra carbon added.
Metal detectable	A blue nylon cable tie with metal content spread throughout the material. Detectable by standard metal detectors. For example it is used by food, pharmaceutical and chemical industries.
Metal barbed	A smooth cable tie with a stainless steel "barbed tooth" providing higher flexibility and higher strength for demanding environments.
Accessories	Cable fixings, cable tie bases, mounts and tools.



STAINLESS STEEL CABLE TIE

Steel cable ties, made from 316 grade stainless steel. All feature very good resistance to weather conditions, UV radiation, aggressive environment or fire.

Type	Description
Stainless Steel	Stainless steel cable ties for tough environments. Available in both uncoated and pure polyester coated 316 grade stainless steel.



EDGE CLIP / CABLE TIE

Ideal for use where holes are not acceptable or where due to temperature problems adhesives will fail. Widely used in the solar sector.

Type	Description
Edge Clip	Two-piece component consisting of a cable tie and an edge clip for fixing at the edges.



COMPARTMENT BOXES

Compartment cable marker assortment box with transparent cover, perfect for storing markers and accessories. Easy to use at installation site. Special filling combinations available to order.



Type	Description
PSK55000 - PA1	49 removable compartments containing PA1 markers: A-Z, 0-9, -, /, GRD, +, -, Blank, L1, L2, L3, N, Teflon-coated installation tool in stainless steel
PSK55000 - PA2	50 removable compartments containing PA2 markers: A-Z, 0-9, -, /, GRD, +, -, Blank, L1, L2, L3, N
PSK55000 - PA02	49 removable compartments containing PA02 markers and installation tools: A-Z, 0-9, -, /, GRD, +, -, Blank, L1, L2, L3, N, Teflon-coated installation tool in stainless steel
PSK55000 - PK2	40 removable compartments containing PK2 markers, holders and cable ties: A-Z, 0-9, /, GRD, +, -, POH07 holders, POH12 holders, PKB25100A9 cable ties, PKB25100A0 cable ties
PSK55000 - PKS	40 removable compartments containing PKS markers, holders and cable ties: A-Z, 0-9, /, GRD, +, -, cable ties PKS46150AN16, holders PKS10060FQS, holders PKS10100FQS

PAD

Applicator for PA markers. For use with single character markers, it reduces installation time significantly. Single character markers are loaded on to the applicator to form the completed legend, then slid on to the wire in one action.



Tools	PAD-3M	PAD-3T	PAD-4M	PAD-4T	PAD-5M	PAD-5T
DESIGNED FOR	PA-02	PA-02	PA-1	PA-1	PA-1	PA-1
MATERIAL	Stainless steel	Teflon coated	Stainless steel	Teflon coated	Stainless steel	Teflon coated

Related products:



PA markers



Accessories

MD / MDH

Complete marking kit for on site work. The MD installation tool and MDH holder form a complete installation magazine for PA sleeves. Excellent aid when working on installation or maintenance. The holder is easily loaded with MD applicators.



Type	Material	Colour
MD:	Acetal	Red for PA02 or blue for PA1
MDH:	Polystyrene	

Type	Holder and applicator with standard kit	Empty holder	Empty applicators	Applicator with standard kit	Applicator with colour code	Applicator with 3-phase marking kit
PA-02 (Red)	MDH2002S	MDH2002	MD-02	MD-02S	MD-02SCC.09	-
PA-1 (Blue)	MDH2010S	MDH2010	MD-10	MD-10S	MD-10SCC.09	MD-10FMS

Related products:



MD / MDH



MD



MDH

CAS / PAM

Cassette for PA02- and PA1 sleeves. Red for PA02 and blue for PA1. Flexible aid for service and maintenance marking. Pocket-size – easy to take along. CAS is double-sided for right and left mounting. PAM has transparent upper side which simultaneously protects the sleeve.



Cassettes	CAS-600	CAS-500	PAM-02	PAM-10
DESIGNED FOR	PA-02	PA-1	PA-02	PA-1
CASSETTE COLOUR	Red	Blue	Red	Blue
MAX NUMBER OF SLEEVES	600 pcs	500 pcs	440 pcs	440 pcs

Related products:



PA markers

SRP

Empty robust steel plate dispenser for storing discs of cable markers. The upper part of the box includes a tray for cable accessories. An ideal aid for installation work. Holds 25 PA02 reels, 21 PA1 reels, 14 PA2 reels or 11 PK2 reels. Combination PA02 and PA1, 11 reels of each.



Type	Length [mm]	Width [mm]	Height [mm]	Tray	QTY/PACK
SRP	160	130	163	155 x 127 x 30	1

Related products:



PHL

Thin-walled, self-extinguishing thermal heat shrink sleeves made of cross linking polyolefin. They feature high flexibility. Designed for insulation, protection, identification purposes and creating harnesses. Shrink ratio 2:1



Material

Flame retardant crosslinked polyolefin

Temperature range

-55°C to +125°C

Shrinkage temperature

+90°C

Sizes and packaging:

Type	Inside Ø before shrinking [mm]	Inside Ø after shrinking [mm]	Wall thickness after shrinking	Packing BN REEL [m]	Packing mini-box [m]
PHL20012*N^	1.20	0.60	0.40 ± 0.08	150	20
PHL20016*N^	1.60	0.80	0.40 ± 0.08	150	17
PHL20024*N^	2.40	1.20	0.42 ± 0.08	150	15
PHL20032*N^	3.20	1.60	0.48 ± 0.10	150	15
PHL20048*N^	4.80	2.40	0.54 ± 0.10	75	12
PHL20064*N^	6.40	3.20	0.50 ± 0.10	75	12
PHL20095*N^	9.50	4.70	0.72 ± 0.12	75	8
PHL20127*N^	12.70	6.40	0.72 ± 0.12	50	8
PHL20190*N^	19.70	9.50	0.80 ± 0.15	50	5
PHL20254*N^	25.40	12.70	0.90 ± 0.15	30	5
PHL20381*N^	38.10	19.00	1.10 ± 0.15	30	-
PHL20508*N^	50.80	25.40	1.10 ± 0.15	30	-
PHL20762*N^	56.20	38.10	1.25 ± 0.20	15	-
PHL21016*N^	101.6	50.8	1.25 ± 0.20	15	-

Accessories

CORD END FERRULES AND CRIMP TERMINALS

Insulated and non-insulated. Simplifies assembly and reduced risk of cable breakage.

Type	Information
Cord end ferrules	Single and double (twin) cord end ferrules, also known as bootlace terminals, insulated. Different colors depending on size and standard. Non-insulated end sleeves are also available
Terminals	Insulated and fully insulated crimp terminals in various designs. Available in the colors red, blue and yellow. Non-insulated crimp terminals are also available
Kit	Containing various kits with cord end ferrules or crimp terminals as well as a press tool.



Cord end ferrules

Terminals

KIT

TAPE

Electrical insulation tapes are made of high quality PVC. They are perfect for insulating wires and cables and protecting them from electrolytic corrosion. Available in different colors.



Craftsmanship and expertise drive our commitment. Through meticulous, functional design and knowledge of the industry, our marking solutions set the standard. With an eye on tomorrow, we ensure that every product contributes to a more secure and efficient electric future for all.



PRINTER FOR PROFILE

	PROMARK	MK10	EOS	MK500	SP8600	PRIMACY
CMD		✓	✓			
CML		✓	✓			
CMM		✓	✓			
CMT		✓	✓			
CMZ		✓	✓			
EF		✓	✓			
EPF		✓	✓			
EPL		✓	✓			
ET		✓	✓			
HF		✓	✓			
MS		✓	✓			
NF		✓	✓			
PA				✓	✓	
PC				✓		
PCT			✓			
PFC						✓
PHZ/PHZF	✓	✓	✓		✓	
PK				✓		
PKZ	✓	✓	✓			
PO/POZ	✓	✓	✓		✓	
PO-06Q, PO-068Q	✓	✓	✓			
POH				✓		
PP+/PPA+	✓	✓	✓			
PPQ/PPQZ		✓	✓			
PRZ		✓	✓			
PS				✓		
SG		✓	✓			
TX-61, TX-96				✓		

Please note. Different size range of the profile for different printers.

FOR BASIC PARTEX MARKERS MK10 and EOS printers

	MK10-RB-BK2020	MK10-RB-BK510	MK10-RB-PR8	MK10-RB-PX6	MK10-RB-DR
PCT		✓	✓	✓	
PO			✓	✓	
POZ	✓	✓	✓	✓	✓
PP+ / PPA+	✓	✓	✓	✓	
PPQ		✓	✓	✓	
PPQZ	✓		✓	✓	✓
PK			✓	✓	
PKZ	✓	✓	✓	✓	
PRZ			✓		✓
PHZ/PHZF	✓			✓	✓

FOR THE PROSLEEVE SERIES MK10 and EOS printers

	MK10-RB-PX6	MK10-RB-BK2020	MK10-RB-BK510	MK10-RB-BKHT	MK10-RB-BKFTIM
CMZ	✓		✓		
CML		✓			
CMT			✓	✓	
CMD		✓			
CMM		✓			
EPL	✓		✓		
EPF		✓			✓
SG		✓			
HF		✓			
MS		✓			✓
ET				✓	
NF		✓			
EF		✓			✓













FOR LABELS PLT, PLTC AND PWT MK10 and EOS printers

	MK10-RB-PR8	MK10-RB-PX6	MK10-RB-5095	MK10-RB-3200	MK10-RB-2300	MK10-RB-BK510
PLT (SM) - MATTE POLYESTER	✓		✓	✓		
PLT (SG) - GLOSS POLYESTER	✓		✓			
PLT (HT) - POLYESTER MT3921	✓		✓			
PLT (PM) - MATTE PAPER	✓			✓	✓	
PLT (VM) - MATTE VINYL	✓	✓	✓			✓
PLT - WINYL MT3690	✓	✓	✓			
PWT (WRAP-AROUND)	✓		✓			
PLT (PP) - POLYPROPYLENE	✓		✓			
PLT (PE) - POLYETHYLENE	✓			✓		
PLTC - VINYL	✓					✓

PACKAGING

	Reel Semi cut markers		Unsorted Standard number sequences		Carton Marker strips
	Compact disc (SN) Semi cut markers conti- nuous marker profile		Sorted To suit customer requirements		DN-reel Continuous profile
	Strip pack Cut loose markers		Paginated Standard number sequences		BN-reel Continuous marker profile
	Single bag Marker strips		Mini box (MB) Heat shrinkable tubing		Box (KN) Continuous profile High quantity

INTERNATIONAL COLOR CODE

	black marker (RAL9011) white print		green marker (RAL6001) white print		red marker white print
	brown marker (RAL8015) white print		blue marker (RAL5010) white print		blue marker white print
	red marker (RAL3018) white print		violet marker (RAL7005) white print		
	orange marker (RAL2004) black print		grey marker (RAL9010) white print		
	yellow marker (RAL1021) black print		white marker (RAL9011) black print		

CLOSED WIRE MARKER

Producttype					
PVC	ZEREX	Ø[mm]	AREA[mm ²]	AWG	Sleeve length [min/max]
PY-01	-	1.0 - 2.0	~0.2 - 0.7	~24 - 19	6-39
PA+02	PAZ+02	1.3 - 3.0	~0.2 - 1.5	~22 - 16	9-48
PA+05	PAZ+05	2.0 - 4.0	~0.5 - 2.5	~18 - 14	9-48
PA+1	PAZ+1	2.5 - 5.0	~0.75 - 4.0	~16 - 11	9-48
PA+11	PAZ+11	2.8 - 5.5	~1.0 - 6.0	~16 - 10	9-48
PA+2	PAZ+2	4.0 - 10.0	~2.5 - 16.0	~13 - 5	9-48
PA-3	PAZ-3	8.0 - 16.0	~16.0 - 70.0	~5 -	9-48
PO-01	POZ01	1.3 / 1.8	~0.25	~23 - 20	9-48
PO-02	POZ02	1.7 / 2.2	~0.5	~20 - 18	9-48
PO-03	POZ03	2.0 / 2.5	~0.75	~18 - 17	9-48
PO-04	POZ04	2.2 / 2.8	~1.0	~17 - 15	9-48
PO-05	POZ05	2.7 / 3.5	~1.5	~15 - 13	9-48
PO-06	POZ06	3.2 / 4.0	~2.5	~13 - 11	9-48
PO-07	POZ07	3.8 / 4.7	~4.0	~11 - 9	9-48
PO-08	POZ08	4.6 / 5.5	~6.0	~9 - 7	9-48
PO-09	POZ09	5.6 / 7.0	~10.0	~7 - 5	9-48
PO-10	POZ10	6.5 / 8.0	~16.0	~5 - 3	9-48
PO-11	POZ11	7.0 / 9.5	~18.0	~4 - 3	9-48
PO-12	POZ12	7.5 / 10.0	~20.0	~4 - 2	9-48
PO-14	POZ14	9.5 / 12.0	~25.0	~1/0	9-48
PO-16	POZ16	11.5 / 14.0	~35.0	~1/0-2/0	9-48
PO-18	POZ18	13.5 / 16.0	~50.0	~2/0-3/0	9-48
PO-20	POZ20	15.5 / 18.0	~70.0	~3/0-4/0	9-48
PO-22	POZ22	17.5 / 20.0	~95.0	~4/0	9-48
PO-24	POZ24	19.5 / 22.0	~120.0	~4/0-5/0	9-48
PO-26	POZ26	21.5 / 24.0	~150.0	~5/0-6/0	9-48
PO-28	POZ28	24.0 / 28.0	~185.0	~6/0-7/0	9-48

Area & AWG sizes for guidance only. Thickness of the cable insulation can differ between different manufacturers. Please contact Partex for sample bags.

OPEN WIRE MARKER

Producttype					
PVC	ZEREX	Ø[mm]	AREA[mm ²]	AWG	Sleeve length [min/max]
PC-10	PCZ10	2.4 - 3.0	~1.0	~22 - 16	9-48
PC-20	PCZ20	3.0 - 4.0	~2.5	~16 - 12	9-48
PC-30	PCZ30	4.0 - 5.0	~4.0	~12 - 11	9-48
PC-40	PCZ40	5.0 - 6.2	~6.0	~11 - 10	9-48
PC-50	-	6.0 - 7.2	~10.0	~7 - 5	9-48

Area & AWG sizes for guidance only. Thickness of the cable insulation can differ between different manufacturers. Please contact Partex for sample bags.

CABLE MARKER

Producttype									
PVC	ZEREX	Length [mm]	Max no of characters	Punched holes	Type	Width [mm]	Length [mm]	Max no of characters	Punched holes
PK	PKZ	9-48 (min-max)	3-30	No	PPQ+10	10	40 / 60 / 80	6 / 12 / 18	Both ends
PK-20Q18	-	18	7	Both ends	PPQ+19	19	40 / 60 / 80	6 / 12 / 18	Both ends
PK-20Q25	PKZ20Q25	25	12	In center	PPQ+38	25,4	60 / 80 / 100	12 / 18 / 25	Both ends
PK-20Q40	PKZ20Q40	40	21	Both ends	PPQ+50	50	80 / 100	18 / 27	Both ends
PK-20Q60	-	60	42	Both ends					
PK-20Q80	-	80	60	Both ends					
PK-20Q100	-	100	82	Both ends					

STAINLESS STEEL MARKER

Type	Width [mm]	Length [mm]	Max no of characters	Punched holes
PKS10	10	39 / 50* / 70* / 90* / 110* / 130* / 150* / 170* / 190* / 220*	5 / 8 / 13 / 18 / 23 / 28 / 34 / 39 / 44 / 57	1 in both ends
PKS19	19	50 / 70 / 90 / 110 / 130	8 / 13 / 18 / 23 / 28	1 in both ends
PKS25	25,4	50 / 70 / 90 / 110 / 130	8 / 13 / 18 / 23 / 28	1 in both ends
PKS32	32	50 / 70 / 90 / 110 / 130	8 / 13 / 18 / 23 / 28	2 in both ends
PKS38	38	50 / 70 / 90 / 110 / 130	8 / 13 / 18 / 23 / 28	2 in both ends



Customized PKS-Markers

*Available with high slits. Note that fewer markers fits when high slits.

PVC AND HALOGEN FREE

Max number of characters	Sleeve length [mm]
3	9
4	12
5	15
7	18
9	21
11	24
13	27
15	30
17	33
19	36
21	39
24	42
27	45
30	48



Customized PA+Profile



Customized PK20Q-Profile



Customized markers sorted on tape/sheet



Customized Continuous Profile



Customized PC-Profile



Customized PK-Profile



-1-X1:U2
11-3-W1
1698612-10-WP311-2-X1:V2
1698612-10-WP311-GNYE-PE
1698612-10
16986

We mark the future

Partex Marking Systems
Tore Lööfs Gata 3
547 31 Gullspång
Sweden

Telefon +46(0)551 28 000
webb partex.nu
E-mail sales@partex.se

